


ELEVATION

2" X 4" WOOD SLATS, MAXIMUM 3 INCH SPACING BETWEEN WOOD SLATS WITH A MINIMUM OF 3 SLATS PER TREE

EXIST TREE TRUNK

ORANGE PLASTIC CONSTRUCTION FENCE WRAPPED TO A MINIMUM OF 3 LAYERS OUTSIDE SLATS

WOOD SLATS SPACING, 3 INCH MAX (TYP.)

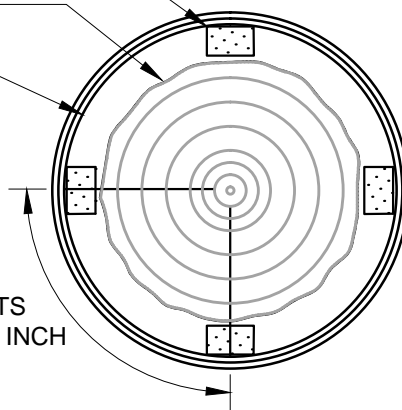

SECTION A-A

NOTE:

1. WRAP ORANGE PLASTIC CONSTRUCTION FENCE ON TOP OF WOOD SLATS WITH AN OVERLAP OF 12 INCHES AND TIE WITH WIRE. SEE SECTION BELOW.
2. TEMPORARY TRUNK WRAP PROTECTION WILL BE ALLOWED ONLY BY APPROVAL FROM THE SENIOR LANDSCAPE ARCHITECT
3. DAMAGE TO BRANCHES & ROOTS SUBJECT TO FINE UP TO APPRAISED VALUE OF THE TREE, PER CITY TREE PRESERVATION ORDINANCE (FMC 4-5100).
4. REFER TO LSD-9 FOR ADDITIONAL TREE PROTECTION REQUIREMENTS APPLICABLE TO THIS DETAIL.
5. TRUNK WRAP SHALL BE IN PLACE NO MORE THAN 5 WORKING DAYS BEFORE WORK ADJACENT TO TREE, AND REMOVED NO MORE THAN 5 WORKING DAYS AFTER WORK ADJACENT TO THE TREE, UNLESS OTHERWISE APPROVED BY THE CITY.

	Council Revision	12/13/11
APPR	REVISED	DATE
REVISIONS		

CITY OF FREMONT
STANDARD DETAILS
CITY STANDARD
TEMPORARY TRUNK WRAP
PROTECTION

DATE APPROVED BY CITY COUNCIL
12/13/11

RESOLUTION NO. 2006-31

Ham Hughes
 CITY ENGINEER

FILE NO. LSD-10.DWG	SCALE 3/4"=1'-0"	DRAWN PN/MM	CHECKED RER	DATE DEC. 2011	DWG NO. LSD-10	1 of 1
------------------------	---------------------	----------------	----------------	-------------------	-------------------	--------