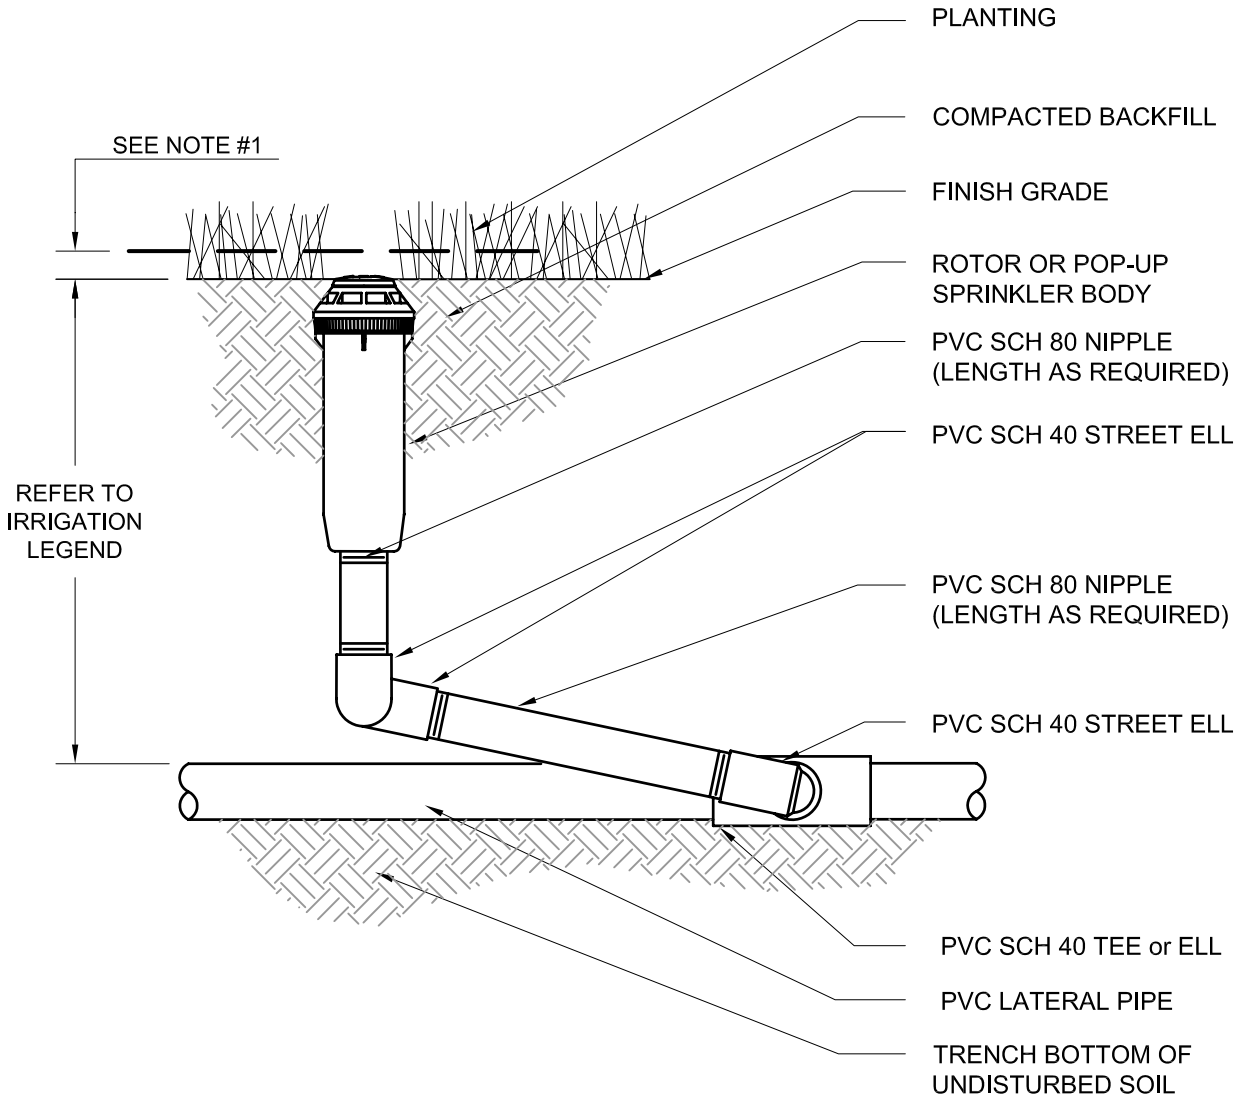

NOTE:

1. INSTALL TOP OF POP-UP SPRINKLER 1 INCH ABOVE FINISHED GRADE IN SHRUB AREAS AND FLUSH WITH GRADE IN TURF AREAS.
2. ROTORS SHALL BE INSTALLED FLUSH IN TURF AREAS.
3. REFER TO CITY STANDARD DETAIL LSD-14 FOR MATERIALS

NO.	REVISED	DATE

REVISIONS

CITY OF FREMONT

STANDARD DETAILS

CITY STANDARD

IRRIGATION ROTOR OR POP-UP

DATE APPROVED BY CITY COUNCIL 04/11/06

RESOLUTION NO. 2006-31

CITY ENGINEER

FILE NO.	SCALE	DRAWN	CHECKED	DATE	DWG NO.	
LSD-21.DWG	NONE	AK/MM/PM	RER	NOV. 2005	LSD-21	21 of 27